

PXQ540

Quad Display Controller




APPLICATIONS

- Advanced Security
- Video Conferencing
- Multiple Views on a Single Monitor
- Courtroom Systems
- Industrial Comparison, Monitoring and Quality Control
- Machine Tool Views
- Patient Interaction and Comparison
- Medical and Criminal Forensics

GENLOCK CAMERAS NOT NEEDED: MicroImage Video Systems advanced digital processing products do not require Genlock cameras or video sources. This makes interfacing and connections quick and easy, as well as eliminating the complicated adjustments involved with Genlock.

QUALITY SCALING ENGINE: The PXQ540 utilizes four high quality scaling units to achieve high resolution in quad display mode.

BORDER LINE FEATURE: We include a border/divider line that helps to distinguish one image from the other. The line may be turned off or set to one of four gray levels.

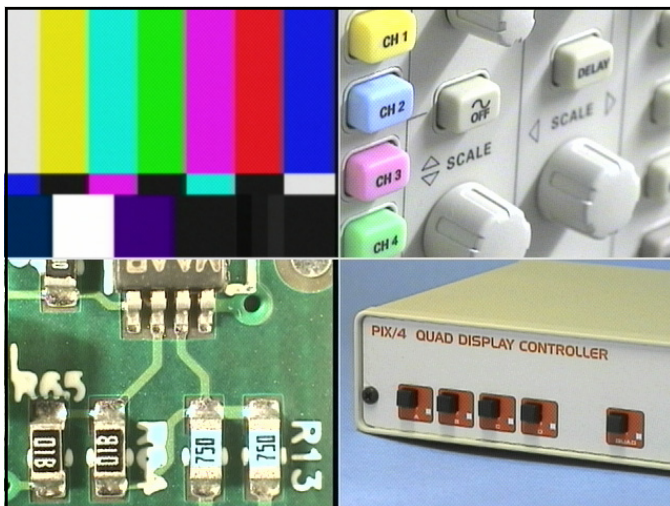

FEATURES

- Easily select quad display mode or full screen display of any one of the four input signals
- Does not require genlock cameras or video sources
- Can use almost any NTSC or PAL video source including camcorders and VCRs
- Includes four independent time base correctors
- Digital Signal Processing (DSP) assures accurate and repeatable performance
- Can be easily used as a quad synchronized switch.
- Composite video inputs
- Composite and S-Video outputs
- Selectable border line in quad display mode
- Built in color bar test signal generator
- RS-232 wired remote control port included
- Switch selectable for NTSC or PAL operation
- Rack mount option available
- Can operate from +5VDC for mobile applications

FLEXIBLE CONNECTIONS: The PXQ540 will operate with composite input signals. It produces both composite and S-Video outputs simultaneously. Both NTSC and PAL Video are supported.



EASY TO USE: Switching between modes is simple with the front panel switches. Individual switches are provided to select the quad mode, any of the four inputs or color bars. The border can easily be turned off and on as well.

RS232 CONTROL INCLUDED: An RS-232 wired control connection is included for applications where the PXQ540 must be computer controlled or remotely controlled. You can also query the unit to find the current settings.

BUILT IN COLOR BARS: The PXQ540 includes a color bar test signal generator for system testing and monitor alignment.



BOARD AND CUSTOM PRODUCTS: MicroImage Video Systems offers many of its products, such as the PXQ540, as board level (i.e. BL-PXQ540-00) for OEM applications. We can create units with custom features as well as custom designed boards. For this product family, other scaling ratios are possible. Contact MicroImage Video Systems for additional information.

MORE INFORMATION? Additional product information, specifications, user manual and application notes are available on our website, including the latest available features.



A division of World Video Sales Company, Inc.

Prices and specifications are subject to change without notice

WWW.MIVS.COM

info@mivs.com

Phone 610-754-6800

Fax 610-754-9766

PO Box 331 Boyertown, PA 19512

Manufactured in the USA by MIVS. Revised January 17, 2008