


Option Jumpers


Default = OFF (No Jumper)

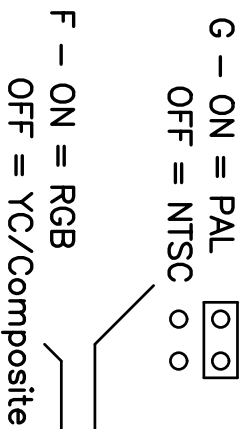

Note: Jumper changes will not take effect until next unit power up.

(Optional) Power Indicator LED

Factory Test Header

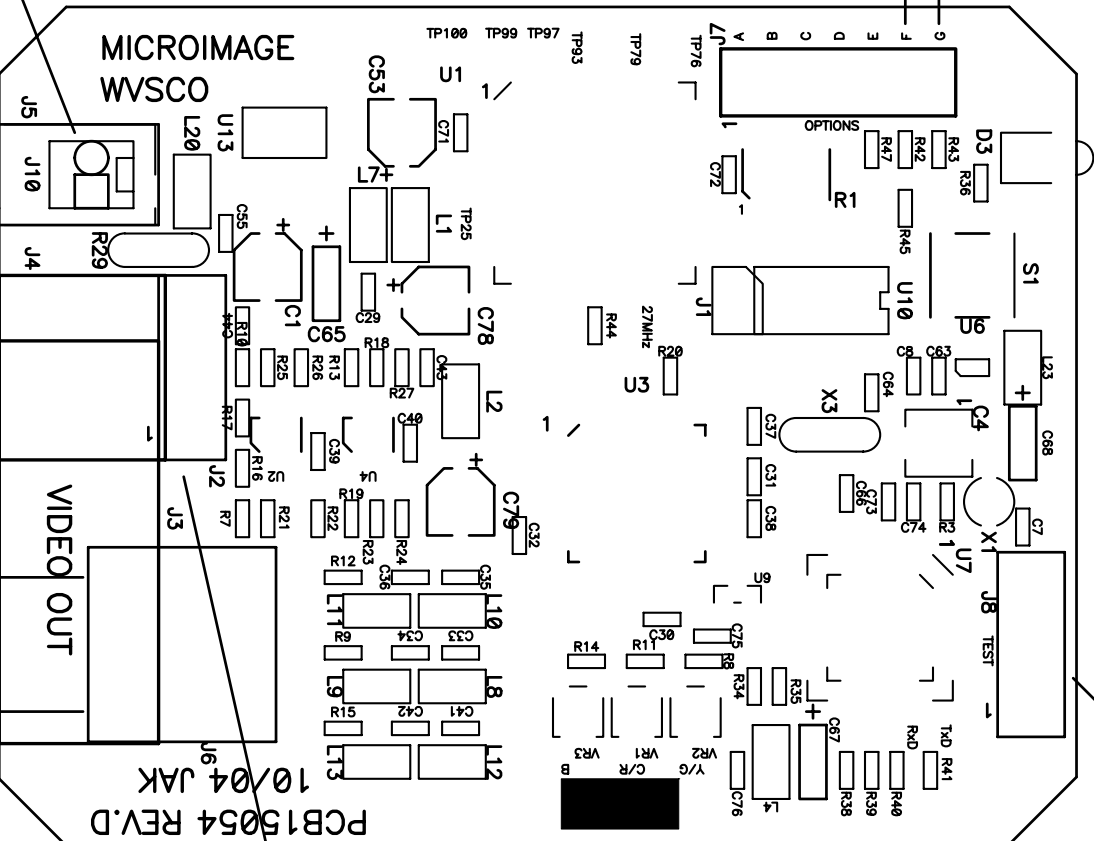

**MICROIMAGE VIDEO SYSTEMS
CBG310, CBG410
DIGITAL COLOR BAR GENERATOR
Rev.D 10/04**

- (Optional) 6 pin 2mm Video Output Header**
- Pin 1 — Ground (Blk)
 - Pin 2 — Ground
 - Pin 3 — Chroma
 - Pin 4 — Luminance (Yel)
 - Pin 5 — Composite
 - Pin 6 — Sync Out

MICROIMAGE WVSCO

VIDEO OUT

- (Optional) 2 pin 0.1" Power Header**
- Pin 1 — Power (Red)
 - Pin 2 — Ground (Blk)

- 5 — 6 volt DC Input, 200mA Typical
- Mini-DIN — S-Video Output (CBG310)
- RGBS Video Output (CBG410)

accepting 3.5mm miniature phone plug.